



Lunar

Ceiling Mount Dual Technology Detector

Features:

- Dual MW & PIR Technologies
- Anti-Cloak™ Technology
- "Green" setting - MW disabled during unset
- Active IR Anti-Mask with separate relay
- Built-in EOL resistors, jumper selectable
- Cover and back tampers
- Opto-relays for low current consumption and long lifetime
- Remote and local self test
- Set and LED control inputs
- Superior fluorescent interference rejection

LuNAR Green Line DT AM detectors are the ultimate for professional 3600 ceiling mount installations, incorporating both Anti-Mask and Anti-Cloak™ Technologies (ACT™), adhering to new environmentally friendly guidelines, and complying with PD6662, EN50131-1 Grade 3 and TS50131-2-4 requirements.

In response to the recent growth in environmental awareness, Rokonet has implemented a new "Green Line" concept in the LuNAR DT AM Grade 3, by effectively eliminating surplus MW radiation during unset periods.

LuNAR Green Line DT AM detectors have a slim, low-profile design and include built-in end-of-line (EOL) resistors to simplify installation.

What is Green Line?


The Green Line is a new concept in detectors that follows environmentally friendly guidelines by avoiding surplus radiation emission. In Green Line detectors, the active MW channel can be disabled when the alarm system is in "unset" mode, thus eliminating surplus MW radiation while occupants are in the premises.

Ordering Information

Part number	Description
RK 150DTG300B	LuNAR Green Line DT AM Grade 3
RK 150DTG3FRA	LuNAR Green Line DT AM Grade 3 (9.9 GHz for France and Czech Republic)

Technical Specifications

Electrical	LUNAR DT
Intruder detection method	Combined PIR & Microwave with Anti-Cloak™ Technology
Coverage	13m diameter at 4m mounting height
Detection zones	60 zones; 30 Fresnel segments arranged in 3 optical levels:
12 external, Anti-Masking method	12 middle and 6 internal segments Active Infrared
Temperature compensation	Patented True Temperature Compensation, Microprocessor controlled
Trouble indication	Visual & separate AM / trouble relay
RFI immunity	30 V/m from 10MHz to 1GHz
Operating voltage	9-16 VDC
Current consumption at	12VDC 12mA typical, 39mA maximum with all 3 LEDs on
Alarm, Tamper and AM contacts	Opto relays, N.C., 100mA, 24VDC
Alarm time	2.2 sec. minimum
Optical filtering for white light protection	Pigmented PIR sensor cover
Operating temperature	-20° to 55° C
Storage temperature	-20° to 60° C
Dimensions (Diameter x Height)	135mm x 27mm
Maximum recommended installation height	4m

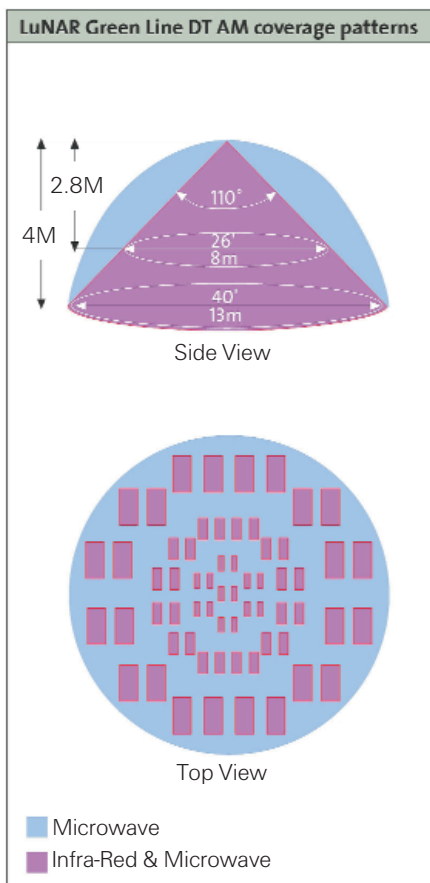

For further information on how we can help you, contact your local ADT office:

Austria - ADT Austria
 Tel: 662 45 24 60 11
 Website: www.adteurope.com

Belgium - ADT Security Services SA,
 Tel: 02 481 08 00
 Website: www.adt-belgium.be

Czech Republik - ADT Security Center s.r.o.
 Tel: 267 267 267
 Website: www.adt-sc.cz

Denmark - ADT A/S
 Tel: 70 80 70 00
 Website: www.adt-nordic.com

Germany - ADT Deutschland GmbH
 Tel: 0800 7070 238
 Website: www.adt-deutschland.de

Greece - ADT Greece SA
 Tel: 210 92 43 400
 Website: www.adt.gr

Hungary - ADT Hungary
 Tel: +3614303700
 Website: www.adthungary.com

Ireland - ADT Fire and Security plc
 Tel: 1620 5888
 Website: www.adt.ie

Italy - ADT Italy
 Tel: 02 818061
 Website: www.adtitaly.com

The Netherlands - ADT Security Services B.V.
 Tel: 010 258 4848
 Website: www.adt-security.nl

Poland - ADT Poland Sp. Z o.o.
 Tel: 0 801 801 238
 Website: www.adt.pl

Portugal - ADT Portugal
 Tel: 217 510 560
 Website: www.adt-pt.com

Russia - ADT Russia
 Tel: +7 (495) 661 2094
 Website: www.adtrussia.com

Spain - ADT Servicios de Seguridad SL
 Tel: 902 444 440
 Website: www.adt-es.com

Sweden - ADT AB
 Tel: 8 40 00 70 00
 Website: www.adt-nordic.com

Switzerland - ADT Switzerland
 Tel: 0848 40 08 01
 Website: www.adt-ch.com

United Kingdom - ADT Fire & Security plc
 Tel: 0800 010 999
 Website: www.adt.co.uk

